


Technical Specifications PX-1

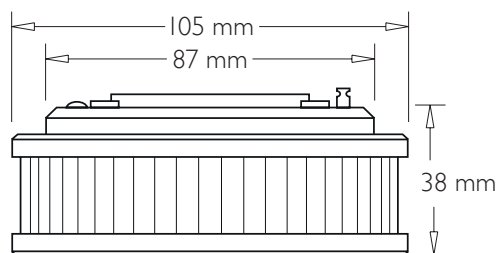

Application	Smoke detector according to EN14604:2005/AC:2008, with Q-label
Coverage	Up to 60 m ² (depending on structural conditions)
Battery	1 x 3.0 V lithium (built in)
Battery Life	10 years
Alarm Volume	> 85 dB alarm
Alarm Temperature*	≥ 60° C
Ambient Operating Temperature	5 to 55° C
Optimum Storage Contitions	5 to 35° C, <70% rel. humidity
Protection Class	IP 40
Colour of Casing	White
Material (Casing)	ABS
Product Dimensions	105 x 38 mm
Weight	137 g net (without adhesive Gel-Pad) 176 g net (including adhesive Gel-Pad) 236 g gross (including adhesive Gel-Pad + packaging)
Data Storage with Export Function	✓
Bi-Sensor-Technologie (smoke and heat detection)	✓
Kitchen suitable	✓
Installation Method	Certified adhesive acrylate foam pad for screw and adhesive mounting
Manufacturer	Pyrex GmbH

* The value of 60° C is the temperature to which the device has to be warmed up so that the acoustic warning will be given.
The actual ambient temperature may vary.